


特點

- High reliability, long life.
- Safety.
- Low input power consumption.
- No contact points.
- No switching sparks.
- No noise.
- No mechanical damage.

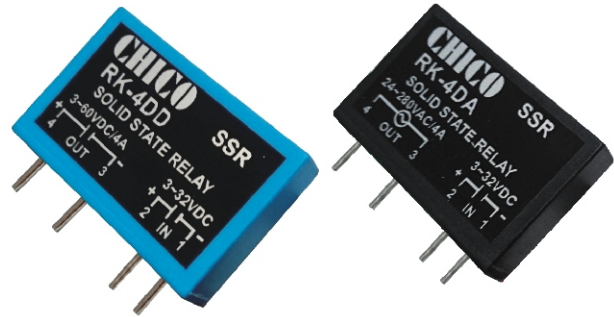

1.選購型號 : RK-□□□-□

NO	Output Current	NO	Input Voltage	NO	Output Voltage	NO	High Voltage
2	2A	D	DC 3~32V	D	DC 3~60V		Standard Type
4	4A	A	AC 80~280V	HD	DC 3~120V	H	Output Voltage AC 24 ~ 480V
6	6A			A	AC 24~280V		

2.主要規格

Type	RK-2DA	RK-4DA	RK-6DA	RK-2DD	RK-4DD	RK-4DHD	RK-2AD	RK-4AD	
Max load current	2A	4A	6A	2A	4A	4A	2A	4A	
Max 1-cycle peak surge	30A	50A	60A	3A	8.5A	8.5A	3A	8.5A	
Control voltage range	3 ~ 32 VDC			3 ~ 32 VDC			80 ~ 280 VAC		
Must turn off voltage	MAX 1.0 VDC			MAX 1.0 VDC			MAX 10 VAC		
Load voltage range	24~280 VAC			3 ~ 60 VDC		3 ~ 120 VDC	3 ~ 60 VDC		
Min blocking voltage	600 VAC			80 VDC		140 VDC	80 VDC		
Max off-state leakage	Less 5 mA			Less 1 mA			Less 1 mA		
Dielectric strength input-output	4000 VACrms			2500 Vrms			2500 Vrms		
Turn off time	LESS 1/2 AC cycle			LESS 1/2 cycle			LESS 1/2 See		
Max off-state dv/dt	100 V/μSEC			200 V/μSEC					
Max on-state voltage drop	1.5 VAC	2.0 VAC		1.2 Vrms					
Input impedance	1.5 Kohm								
Frequency range	47 ~ 70 Hz								
Isolate impedance	10 ⁹ ohm								
Turn on time	Less 2 mSec								
Capacitance in-out	Less 15 PF								
Weight	10g	12g		10g	12g	12g	10g	12g	

3.外觀尺寸(Unit:mm)

