

特點/Features

- 材質：鋼/Material : S45C
- 表面處理：染黑/Surface Treatment : Dye black
- 高扭力、高剛性/High torque、high rigid
- 零背隙、低慣性/Zero backlash、Low inertia
- 適合用於中大型伺服馬達/
Applicable to large and medium servo motors
- 固定方式：免鍵軸環固定式/
Fixed mode : Fixed by free-button compression ring



選購型號/Order NO.


CS-AP-C - X

NO.	外徑 / Diameter	NO.	孔徑 / Aperture (Min)	NO.	孔徑 / Aperture (Max)
68	∅ 68mm	10	∅ 10mm	18	∅ 18mm
82	∅ 82mm	14	∅ 14mm	30	∅ 30mm
94	∅ 94mm	14	∅ 14mm	35	∅ 35mm
104	∅ 104mm	20	∅ 20mm	42	∅ 42mm
126	∅ 126mm	25	∅ 25mm	50	∅ 50mm

CS-AP-C - X

NO.	外徑 / Diameter	NO.	孔徑 / Aperture (Min)	NO.	孔徑 / Aperture (Max)
144	∅ 144mm	30	∅ 30mm	55	∅ 55mm
168	∅ 168mm	35	∅ 35mm	65	∅ 65mm
180	∅ 180mm	35	∅ 35mm	75	∅ 75mm
215	∅ 215mm	40	∅ 40mm	85	∅ 85mm

外型尺寸/Dimensions (Unit:mm)

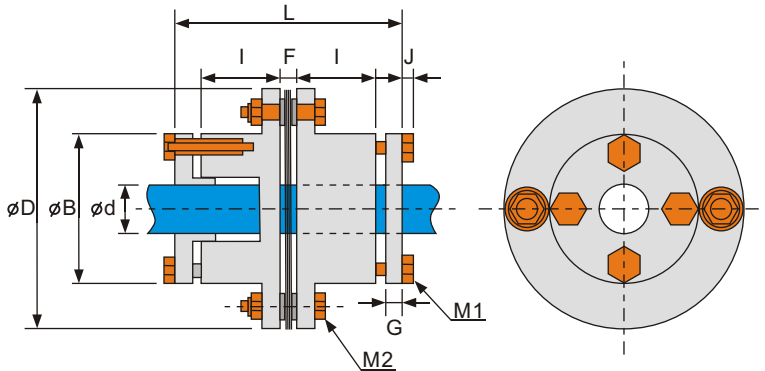

單位/Unit:mm

TYPE	D	B	D		L	I	F	G	J	M1	M2
			Min	Max							
CS-AP-68C	68	40	10	18	76	25	6	7	5	M6x4	M6
CS-AP-82C	82	54	14	30	76.2	25	6.2	7	5	M6x4	M6
CS-AP-94C	94	58	14	35	89.6	30	9.6	7	5	M6x4	M8
CS-AP-104C	104	68	20	42	98	33	10	8	5	M6x6	M8
CS-AP-126C	126	78	25	50	117	40	11	10	7	M8x4	M10
CS-AP-144C	144	88	30	55	128	45	12	10	7	M8x4	M10
CS-AP-168C	168	104	35	65	200	75	14	15	7	M8x6	M10
CS-AP-180C	180	120	35	75	212	80	16	15	7	M8x6	M10
CS-AP-215C	215	128	40	85	242	90	20	18	8	M10x6	M16

規格/Specifications

TYPE	Rated Torque 一般扭力 (N.m)	Max. Torque 最大扭力 (N.m)	Max. Rotational Frequency 最高回轉數 (Rpm/min)	Moment* of Inertia 慣性 (kg m ²)	Errors of Shaft End-Play 容許軸向位差 (mm)	Errors of Angularity 容許偏角 (°)
CS-AP-68C	39	78	20000	3	±0.8	1
CS-AP-82C	78	156	17000	8.7	±1.0	1
CS-AP-94C	176	352	15000	16	±1.2	1
CS-AP-104C	245	490	13000	26	±1.4	1
CS-AP-126C	440	880	11000	65	±1.6	1
CS-AP-144C	780	1560	9000	99	±1.8	1
CS-AP-168C	1170	2340	5100	238	±1.0	1
CS-AP-180C	1960	3920	4800	365	±1.0	1
CS-AP-215C	4900	9800	4300	830	±1.0	1