

特點/Features

- 材質/Material
CS-WS 系列：鋁合金/Aluminum alloy
CS-WSS系列：不銹鋼/Stainless steel
- 固定方式：止付螺絲固定式/
Fixed mode : Set screw type
- 一體成型、小巧/One-body shape
- 零背隙/Zero backlash
- 剛性大/High rigid
- 偏角誤差較佳/High deflection




選購型號/Order NO.

CS-WS/WSS- \square - \square X \square

(ϕD) ($\phi d1$) ($\phi d2$)

NO.	外徑/Diameter	NO.	孔徑/Aperture(Min)	NO.	孔徑/Aperture(Max)
16	ϕ 16mm	5	ϕ 5mm	6	ϕ 6mm
20	ϕ 20mm	5	ϕ 5mm	10	ϕ 10mm
25	ϕ 25mm	6	ϕ 6mm	12	ϕ 12mm
32	ϕ 32mm	6	ϕ 6mm	14	ϕ 14mm

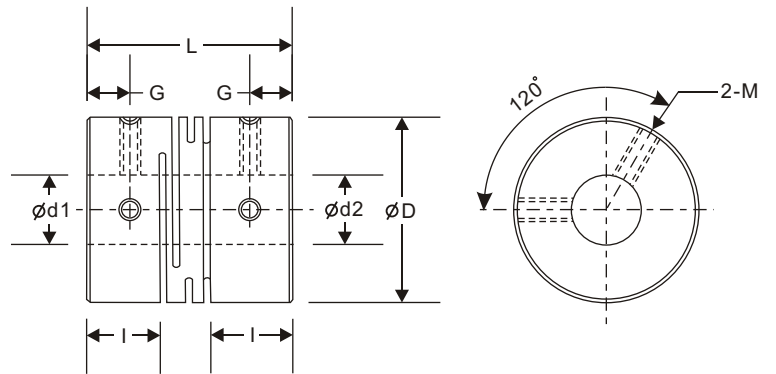

規格/Specifications

TYPE	Rated Torque 一般扭力 (N.m)	Max. Torque 最大扭力 (N.m)	Max. Rotational Frequency 最高回轉數 (min ⁻¹)	Moment* of Inertia 慣性 (kg m ²)	Static Torsional Stiffness 剛性靜扭力值 (N.m/rad)	Errors of Angularity 容許偏角 ($^{\circ}$)	Errors of Shaft End-Play 容許軸向位差 (mm)
CS-WS-16	0.3	0.6	24000	2.8×10^{-7}	110	1	± 0.2
CS-WS-20	0.5	1	19000	7.5×10^{-7}	130	1	± 0.2
CS-WS-25	1	2	15000	2.3×10^{-6}	350	1	± 0.2
CS-WS-32	2	4	12000	8.0×10^{-6}	650	1	± 0.2
CS-WSS-16	0.5	1	24000	7.2×10^{-7}	240	1	± 0.1
CS-WSS-20	1	2	19000	2.0×10^{-6}	330	1	± 0.1
CS-WSS-25	2	4	15000	6.1×10^{-6}	720	1	± 0.2
CS-WSS-32	3.5	7	12000	2.1×10^{-5}	1300	1	± 0.2

外型尺寸/Dimensions (Unit:mm)

TYPE	D	I	L	G	M	d1xd2 標準孔徑 公差(H8)		Mass* 質量(g)
						Min	Max	
CS-WS-16	16	6.8	18	3	M3	5	6	7.4
CS-WS-20	20	7.65	20	3	M4	5	10	12
CS-WS-25	25	9.6	25	4	M4	6	12	24
CS-WS-32	32	12.6	32	6	M5	6	14	50
CS-WSS-16	16	6.8	18	3	M3	5	6	18
CS-WSS-20	20	7.65	20	3	M4	5	10	32
CS-WSS-25	25	9.6	25	4	M4	6	12	63
CS-WSS-32	32	12.6	32	6	M5	6	14	130