

ELECTRICAL SPEC.

Stroke (mm) 量測行程	250, 500, 1000
Sensor	Wire-wound and hybrid potentiometer
Output Signal Mode 輸出信號模式	Resistance (Potentiometer)
Resolution 解析	Essentially infinite
Linearity 線性度	(standard class) $\pm 0.25\%$ FS; (precision class) $\pm 0.1\%$ FS
Repeatability 重覆性	$\pm 0.02\%$ FS
Output Resistance 輸出電阻值	(standard class) 5K ohm $\pm 10\%$ FS; (precision class) 5K ohm $\pm 5\%$ FS
Power Rating (watts)	(stroke 500 mm) 1W at 40°C; (stroke 1000mm) 2W at 40°C
Recommended Input Voltage 輸入電壓	30V (AC/DC) max., best voltage at 5 ~ 10 VAC/VDC


MECHANICAL SPEC.

Wire specification 線徑規格	Material: SUS304 with nylon coating; Diameter:0.6 mm; Breaking load:16 Kg
Max. Travel Speed 最大往復速度	500 mm / sec.
Vibration 震動	10 Hz to 2000 Hz, 10g
Cable 電線	$\varnothing 4.2$, 50 cm long
Weight 重量	< 600g
Starting Torque on Spring 拉力	< 600g

ENVIRONMENTAL SPEC.

Operating Temp. / Humidity 操作溫度/濕度	-20°C ~ 70°C, RH35% ~ 90% (No Condensation)
Storage Temp. 儲存溫度	-20°C ~ 80°C
Protection 保護等級	IP50 : Dust Proof (only for potentiometer housing)

Electrical Connection

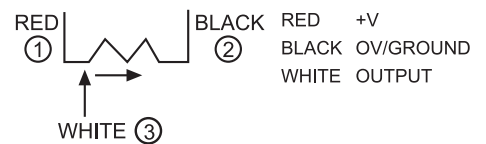

ORDERING INFORMATION

EHP-SS-R	Measuring Range 量測行程	Signal Mode 信號模式	Life 壽命及線性度
	025 : 250 mm	R: Resistance 5K ohm	Blank: 1 X 10 ⁶ cycles, linearity 0.25% FS
	05 : 500 mm		*F: 5 X 10 ⁶ cycles, linearity 0.1% FS
	10 : 1000 mm		*F25: 5 X 10 ⁶ cycles, linearity 0.25% FS