

MT-C3 系列

- 3-DIGIT 0.8" (20mm)HIGH RED LED
- 4-DIGIT 0.56" (14mm)HIGH RED LED
- 5-DIGIT 0.56" (14mm)HIGH RED LED
- 6-DIGIT 0.39" (9.9mm)HIGH RED LED
- 8-DIGIT 0.3" (7.62mm)HIGH RED LED





1. 選購型號 : MT-C3- 00

NO	外型尺寸	NO	顯示位數
3	72 x 36mm Case	3	3 digits (0~999)
		4	4 digits (0~9999)
		5	5 digits (0~99999)
		6	6 digits (0~999999)
		8	8 digits (0~99999999)

2. 主要規格

- 輸入標準 : TTL/HI 3.5V, LO 1V; COMS/HI 7.5V, LO 4V
- 輸入頻率 : Count Input 30cps, Logic Input 1000cps
- 計數分配 : Divide 1 ~ 256 by Jumper(JP3 BIT_0 ~ 7)
- 感應器電源 : DC 12V \pm 20%, 50mA max.
- 記憶維持 : Data can be maintain for 1000 hours at 25
- 工作電源 : AC 110V/220V \pm 10% 50/60Hz;
or AC 90 ~ 260V 50/60Hz (Option)
- 顯示值範圍 : 3-digit 0 ~ 999
4-digit 0 ~ 9999
5-digit 0 ~ 99999
6-digit 0 ~ 999999
8-digit 0 ~ 99999999
- 使用環境條件 : 0~50 (45 to 85% RH)
- 重量 : 275g

3. 外型/開孔尺寸與配線圖

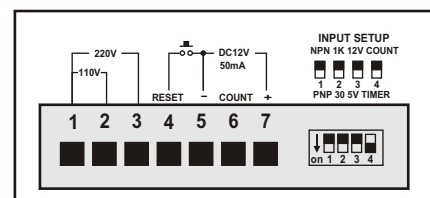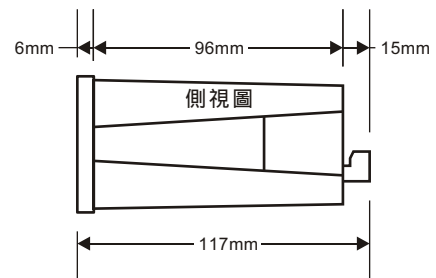

Terminal Pin 1, 2 : for AC Power 110V ; Pin 1, 3 for AC Power 220V.
Terminal Pin 4 : for Reset Input (Short with Pin 5 Enable).
Terminal Pin 5 : DC 0V ; Pin 7 : DC 12V for Sensor Power (50mA max.).
Terminal Pin 6 : for Count Input or Time Hold (Short with Pin 5)

DIP.SW. : SW 1 for Count Input NPN(OFF)/PNP(ON) Select.
DIP.SW. : SW 2 for Count Input contact(ON)/Non_con.(OFF) Select.
DIP.SW. : SW 3 for Count Input Level 12V(OFF)/5V(ON) Select.
DIP.SW. : SW 4 for Timertimebase Input (OnEnable) 50/60 Hz.