

TG-RE-0444N - Normal

PRETA

Direct Current Tachometer generator


- Applications :**
- Industry
 - Speed control & regulation

- Descriptions :**
- The most common DC tachometer generator
 - Permanent magnet excitation
 - Brush-holders under cover
 - Cable connection
 - Low ripple
 - Available with one or two commutator




DIAGRAMS

Base mounting – B3

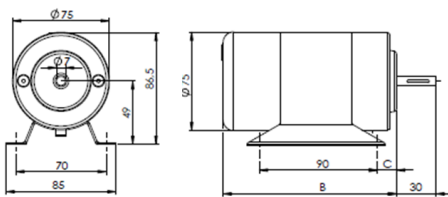

Flange mounting – B5

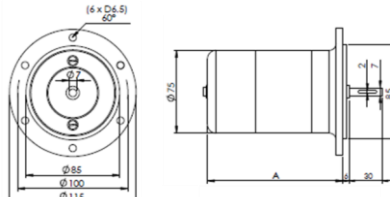

	Shaft diameter	1 commutator	2 commutators
A	Ø 7 mm	126 mm	142 mm
	Ø 11 mm	131 mm	
	Ø 14 mm	128 mm	
B	Ø 7 mm	132 mm	148 mm
	Ø 11 mm	137 mm	
	Ø 14 mm	141 mm	
C	Ø 7 mm	14,5 mm	30 mm
	Ø 11 mm	17,5 mm	
	Ø 14 mm	21,5 mm	


MAIN CHARACTERISTICS

BRUSHES

GRADE	CODE	APPLICATION LIMITS	DIMENSIONS	NUMBER
EG - Electrographite	/0002607	600 V	3,1 x 4,1 x 12,5 mm	4
CA - Silver-graphite	/0001397	< 300 V		

PRODUCT DESCRIPTION

TG-RE-0444N B C 1x60 EG IP44 7x30

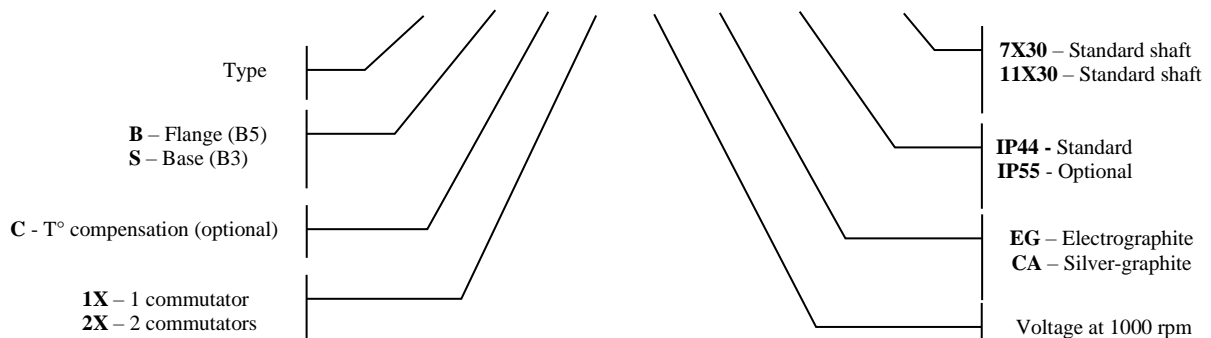

When inquiring, please advise the serial number of the tachogenerator to be replaced.

TG-RE-0444N - Normal

PRETA

Direct Current Tachometer generator

DESIGNATION	SYMB	VALUE
Max. speed	n_m	12 000 rpm
Moment of inertia	J	0,95 Kg cm ²
No-load driving torque	Mr	1,5 N.cm
Max. radial shaft stress		
7x30 mm	F	0,4 da N
11x30 mm	F	1,0 da N
Maximum E.M.F.	E_m	600 V
Maximum linearity error	ΔE	< 0,15 % E_T
Overall ripple rate (peak to peak)	ΔE_c	< 0,5 % E_c
Rotation harmonics (f=2 p.n)	ΔE_p	< 0,2 % E_c
Slots harmonics (f=Z.n.)	ΔE_z	< 0,3 % E_c
Calibration precision	ΔE_o	+ 1 % E_{T_o}
E.M.F. temperature drift		
Not compensated	ΔE_e	0,02 %/°C
Compensated	ΔE_e	0,005 %/°C
Time constant	C_t	2,5 ms
Filter :		
Time constant		0,47 ms
Load current		5 mA
Speed		3 000 rpm

CONSTRUCTION DETAILS	
Number of poles	2
Armature slots number	19
Commutator blades number	57
Insulation class	B (IEC 34-1)
Operating temperature	-30 +130 °C
Climatic protection	C _a (IEC 68-1)
Ingress protection	IP44 (IEC 34-5)
Direction of rotation	reversible
Excitation Permanent magnets:	Alnico

Weight	1.8 kg (1 commutator)
	2.1 kg (2 commutators)

MECHANICAL OPTIONS

	MOUNTING SIDE			OPPOSITE MOUNTING SIDE (upon request)		
	D (mm)	L (mm)	Bearings	D (mm)	L (mm)	Bearings
Standard Shaft	7	30	8 x 22 x 7 ZZ	7	30	8 x 22 x 7 ZZ
Special shaft	14 max	30	15 x 32 x 9 ZZ	8	30	8 x 22 x 7 ZZ



Markings and polarity of terminals (cables) for counter-clockwise rotation, seen from the shaft.

1 COMMUTATOR

Red wire : +
White wire : -

2 COMMUTATORS

1 st comm.	Blue wire: + White wire: -	2 nd comm.	yellow wire: + green wire: -
-----------------------	-------------------------------	-----------------------	---------------------------------

ELECTRICAL OPTIONS

DESCRIPTION	SYMB	UNIT	VALUES											
			1 com.	6	20	30	40	50	60	80	100	120	150	200
E.M.F at 1 000 rpm	E_n	V	1 com.	6	20	30	40	50	60	80	100	120	150	200
			2 com.	2 x 20	2 x 30		2 x 50	2 x 60		2 x 100				
Voltage gradient	C_v	V/rpm	1 com.	0,006	0,02	0,03	0,04	0,05	0,06	0,08	0,1	0,12	0,15	0,2
			2 com.	2 x 0,02	2 x 0,03		2 x 0,05	2 x 0,06		2 x 0,1				
Armature resistance	R_a	Ω	1 com.	1,5	12	28	45	70	100	180	280	400	640	900
			2 com.	2 x 24	2 x 55		2 x 150	2 x 200		2 x 470				
Max thermal load	I_{th}	A	1 com.	1.4	0,55	0,35	0,25	0,22	0,18	0,14	0,11	0,09	0,07	0,07
			2 com.	2 x 0,23	2 x 0,14		2 x 0,09	2 x 0,09		2 x 0,05				
Max. Allowed speed	n_a	rpm	EG	12 000	12 000	12 000	12 000	12 000	10 000	7 500	6 000	5 000	4 000	3 000
			CA	6 000	6 000	6 000	6 000	6 000	5 000	3 750	3 000	2 500	2 000	1 500