


Features

- Extensive operating voltage
DC 12~240V or AC 24 ~ 240V.
- High capacity relay output 3A/250VAC.
- High compact structure IP-65.
- Multi surge killer circuit effectively protects from surge damage.

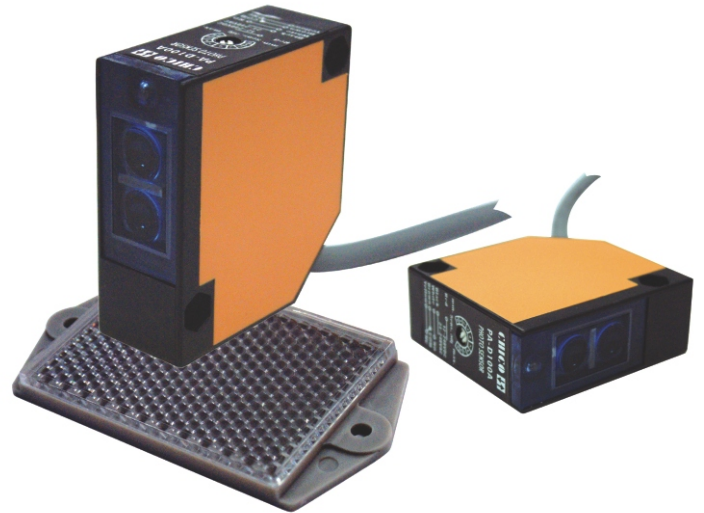

Specifications

Type	PA-D100A	PA-D200A	PA-D400A	PA-R400A	PA-T10MA	PA-T20MA	PA-T100MA
Description	Diffuse refection			Retro refection	Through beam		
Sensing distance	100cm	200cm	400cm	400cm	10m	20m	100m
Weight	Appr.145g				Appr.285g		
Operating voltage	12 ~ 240 VDC ; 24 ~ 240 VAC , 50/60Hz						
Current consumption	2VA max.						
Output method	Relay						
Contact current	3A/250 VAC						
Response time	15 ms						
Connection method	5 Cores / 6.0 × 2mm						
Noise resistance	1500Vp - p/1 μs						
Operating temp./Hum.	-20 ~ +60 ; 35% ~ 85% RH						
Protection degree	IP 65						

Dimensions (Unit:mm)

