

## ■ Features


- Easily network-enable your Serial Devices .
- Replace expansive dedicated PCs .
- Supports a variety of TCP/IP features .
- 10BASE-T NE2000 compatible Ethernet Controller .
- Can maintain remote devices via Internet or Intranet .
- No need to change the existing application programs .



## ■ Specifications

Type	A-7188E1	A-7188E2	A-7188E3	A-7188E4	A-7188E5	A-7188E8
CPU	80188 40MHz					
Ethernet Port	10BASE-T					
COM1 Port	RS-232	RS-232	RS-232	RS-232	RS-232	RS-232
COM2 Port	—	RS-485	RS-485	RS-485	RS-485	RS-485
COM3 Port	—	—	RS-422	RS-232	RS-232	RS-232
COM4 Port	—	—	—	RS-232	RS-232	RS-232
COM5 Port	—	—	—	—	RS-232	RS-232
COM6 Port	—	—	—	—	—	RS-232
COM7 Port	—	—	—	—	—	RS-232
COM8 Port	—	—	—	—	—	RS-232
Operating temperature	-25 to +75					
Storage temperature	-40 to +80					
Dimensions	123mm x 72mm x 33mm					
Power requirement	DC 10~30V					
Power consumption	2W					

## ■ Dimensions (Unit:mm)

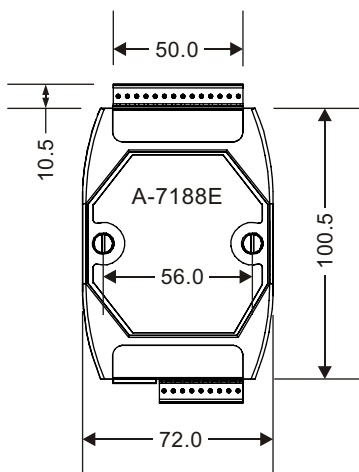

## ■ Applications

