


Your Best Solution for

PC-to-PLC Communication

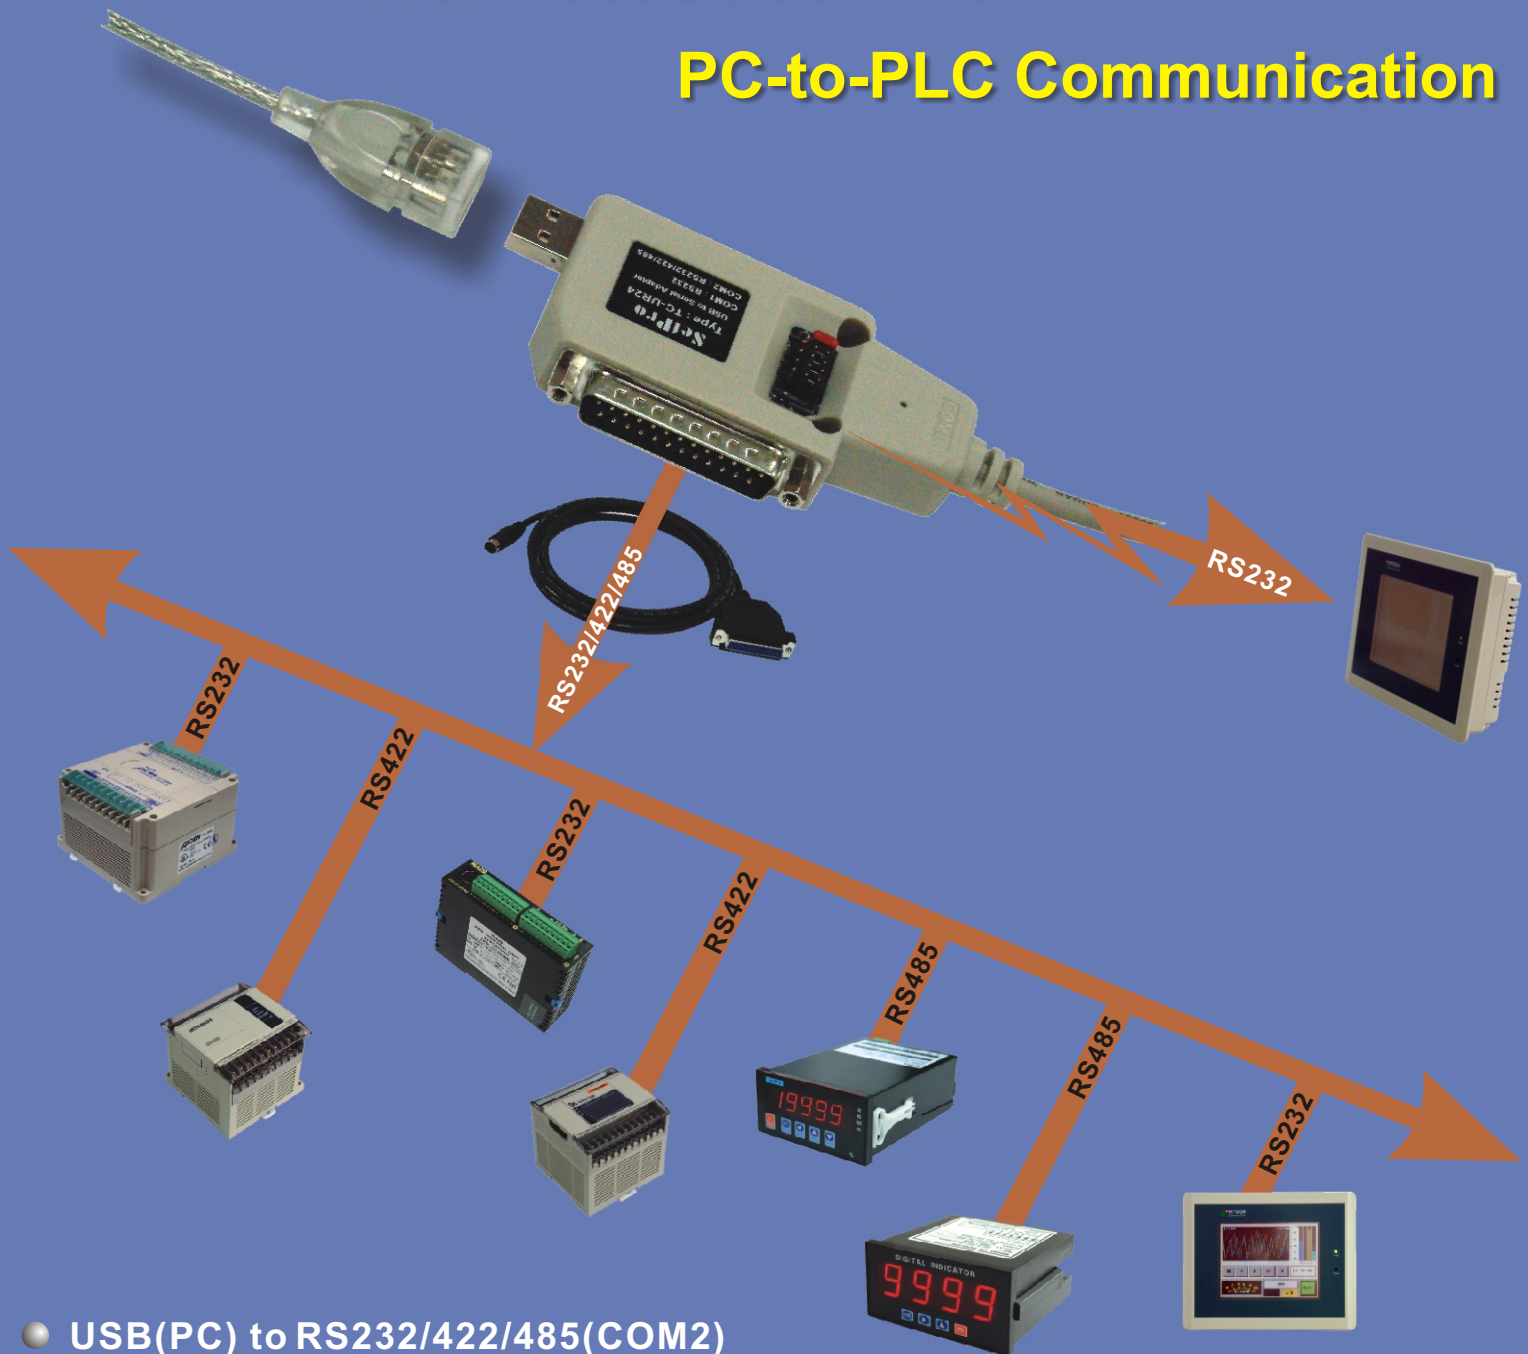

- USB(PC) to RS232/422/485(COM2)
- RS232(COM1) to RS422/485(COM2)
- Bus powered from USB or PLC port
- On-chip oscillator using one 12 MHz crystal
- Double data buffer supporting two-way data transfer
- Two LEDs Display the power and communicate status
- USB drivers running under WinXP, Win2000, WinME and Win98