


## 特點

- 內裝指示燈 (LED) 指示其動作
- 用表面貼焊技術，提供最可靠的品質
- 高絕緣阻抗超過 50M (500VDC)
- 高耐壓超過 2.5KV
- 具零點觸發方式，可有效避免電磁/高頻干擾
- 內裝緩衝回路，可吸收外來的瞬間突波

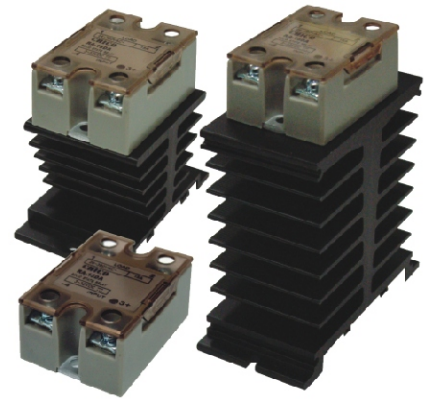

## 1.選購型號：RA-□□□-□

NO	Output Current	NO	Input Voltage	NO	Output Voltage	NO	High Voltage
05	5A	D	DC 3~32V	D	DC 5~60V		Standard Type
10	10A	A	AC 80~250V	A	AC 24~380V		Output Voltage AC 75~480V DC 5~200V
15	15A	V	Adjusted Output Voltage (Range = 0~90%)			H	
25	25A						
40	40A						
80	80A						

## 2.主要規格

Type	DA	DA-H	AA	AA-H	VA	VA-H	DD	DD-H
Load current	5~80A	10~80A	5~80A	10~80A	5~40A	10~40A	5~10A	5~10A
Output operating voltage	24~380VAC	75~480VAC	24~380VAC	75~480VAC	24~380VAC	75~480VAC	5~60VDC	5~200VDC
Leakage current	< 3.0mA	< 5.0mA	< 3.0mA	< 5.0mA	< 5.0mA		< 0.8mA	
Input operating voltage	3~32VDC		80~250VAC 50/60Hz		-		3~32VDC	
Trigger current	7.5mA/12VDC max		5.0mA/110VAC max		-		7.5mA/12VDC max	
Control method	Zero cross trigger				Phase control		Isolated by photocouple	
Response time	ON < 10ms, OFF < 10ms		ON < 20ms, OFF < 20ms		-		1ms < ON+OFF >	
Variable resistance	-				Trimmer 250K /110V, 500K /220V, 1M /380V		-	
Voltage drop	1.6V							
Insulation resistance	Min. 50M (500VDC)							
Dielectric strength	2500VAC 50/60Hz for 1min							
Ambient temp./hum.	-20 ~+80 /45%~85%RH							
Weight	Approx.105g		Approx.100g				Approx.110g	

## 3.外觀尺寸 (Unit:mm)

