


I-7510A:

Pin Assignment and Specifications:

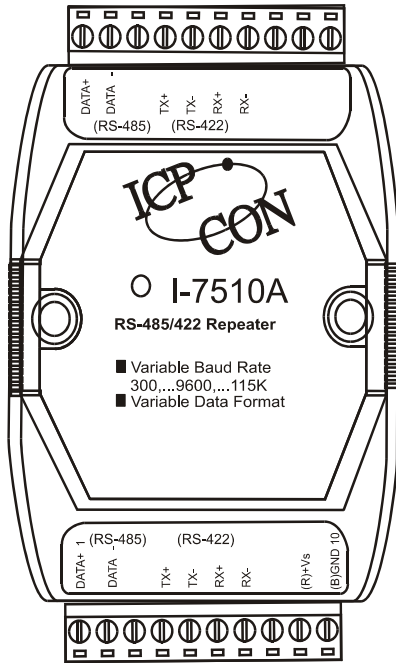

### 7510A: RS-485/RS-422 Repeater

- Input: RS-485/RS-422
- Output: RS-485/RS-422
- Speed: "Self Tuner" inside, auto switching baud rate, from 300 to 115200 BPS
- Isolation voltage: 3000V
- Connector: plug-in screw terminal block
- Power requirements: +10V to +30VDC
- Power consumption: 2.2W(Max)

Block Diagram:

